


JUKOLA 3D TEXTURES



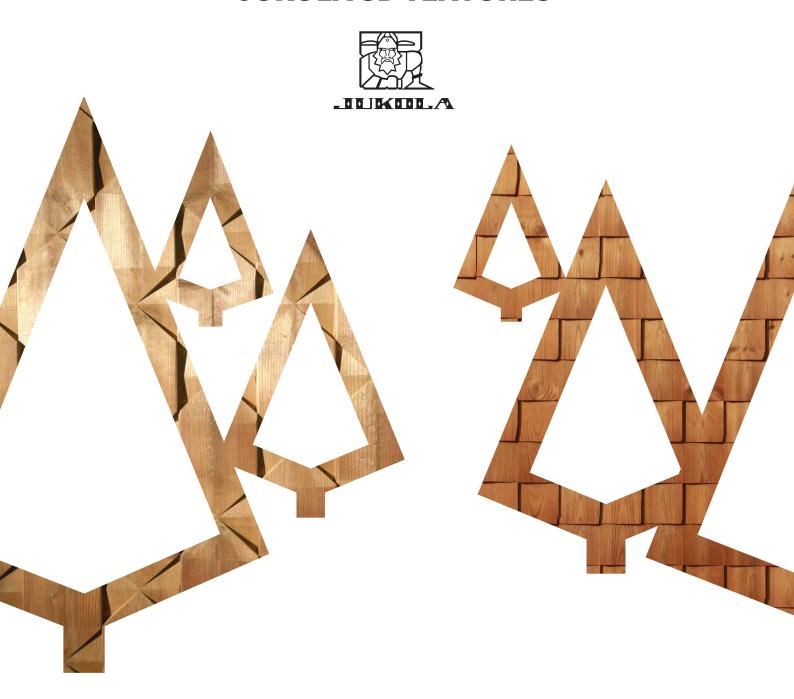

JUKOLA 3D TEXTURES

- Invidual design for interiors and facades

Lunawood's Jukola 3D panels combine the state-of-art in wooden processing with traditional and contemporary Finnish design. The surfaces are composed of specially machined, yet conventional Thermowood profile boards. These boards can be applied in infinite ways as interior decorations as well as facade cladding. We only use the very best Scandinavian pine to ensure prime result.

The **Jukola Portfolio has 6 beautiful textures** for creating an unique style for private and public houses, hotels, restaurants and offices. Non-toxic, VOC- and resin free Lunawood Thermowood is a perfect material for interiors. It also has sound absorbing and antibacterial qualities.

THE BENEFITS OF JUKOLA 3D TEXTURES

- Impressive 3D surface with many texture variations
- · For interior and outdoor surfaces
- Patented 3D production technique
- Thermowood is resin free, 100% natural and weather-proof









NON TOXIC





WEATHER ENDURANCE DIMENSIONAL STABILITY

ALL CLIMATES

RESIN

THERMAL INSULATION

BEAUTIFUL TEXTURES INSPIRED BY NATURE

Jukola portfolio has six standard textures inspired by Scandinavian nature. If you have a need for your own customized pattern, please contact our sales team to hear more.



JUKOLA TEXTURE 440-1



JUKOLA TEXTURE 220-1



JUKOLA TEXTURE 110-1



JUKOLA TEXTURE 206-0



JUKOLA TEXTURE 207-1



JUKOLA TEXTURE 201-1A

JUKOLA PROFILE	
dimensions (mm)	26x92
class	LunaThermo-D
species	Scandinavian pine
length (m)	3,0-4,2
1 m²	11,63m






INSTALLATION INSTRUCTIONS

BEFORE INSTALLING

Before installing the panels, it is important to focus on creating the desired pattern. Place the panels next to each other e.g. on the floor and create the pattern that you want. Fit the height of the installation area to match the pattern in a way that the pattern is evenly distributed.

Mark up cutting lines for the bottom and upper ends of the boards. Cut the boards based on the cutting lines and inspect the fitting of the boards against the final installation height. If you want to create an even pattern you can use two measurement boards to fix the pattern and help cutting all other boards. If it is necessary to continue individual boards, the seam is recommended to be placed on straight line of the pattern.



INSTALLING THE PANELS

It is recommended that Jukola panels are installed with hidden screwing, leaving no visible screws on the surface of the pattern. Hidden screwing is done with a 3 - 4 x 45 mm countersunk screw diagonally from the base of the tongue connector (look at the photo). If the panel is to be screwed on by the top, the countersunk screw can be hidden by screwing diagonally from the inner corners of the cut.

Interested to hear more?

Find us at www.lunawood.com/contact









LUNAWOOD.COM